TÜVRheinland ZERTIFIZIERT
Management System
ISO 14001:2015
ISO 9001:2015
IATF 16949:2016
www.tuv.com
ID 9108619567

HN Lü-SK

Additional protection cap

for complication operating conditions

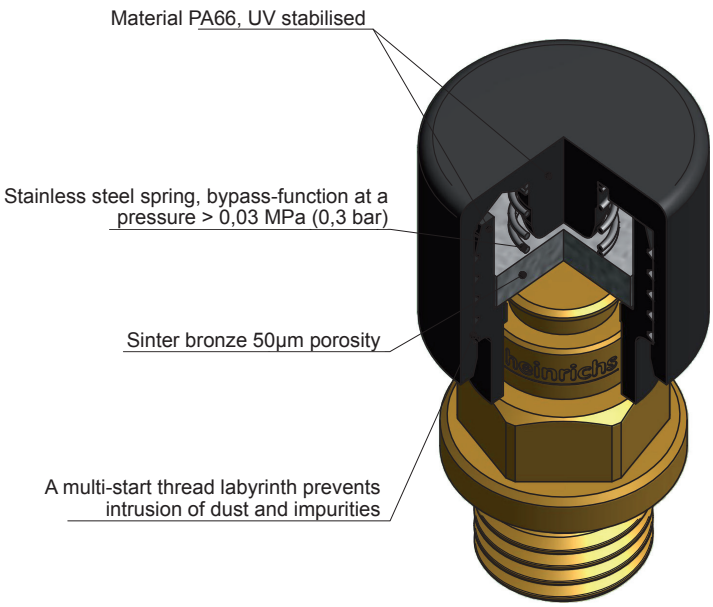

Before assembly:

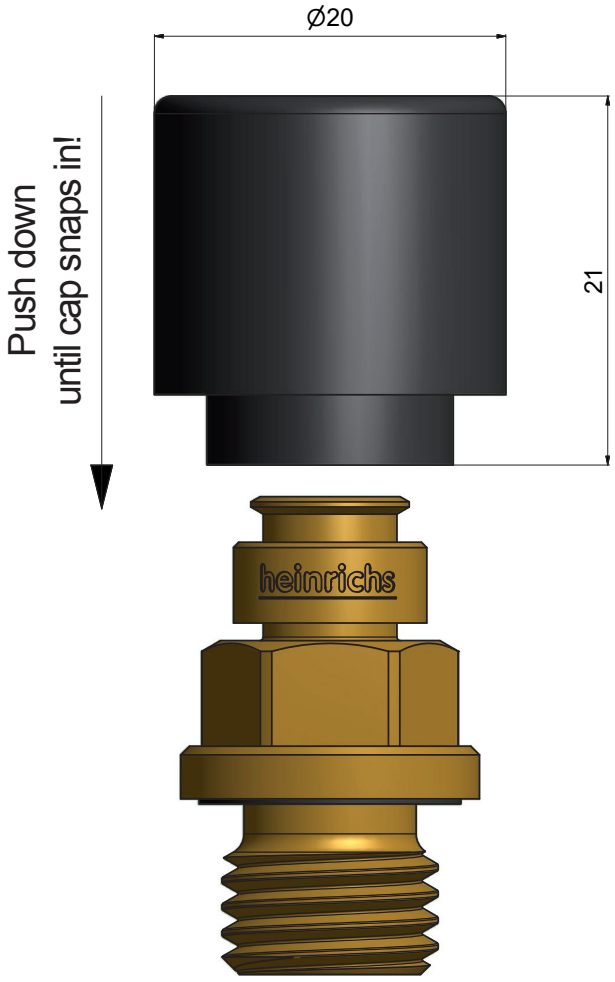

After assembly:

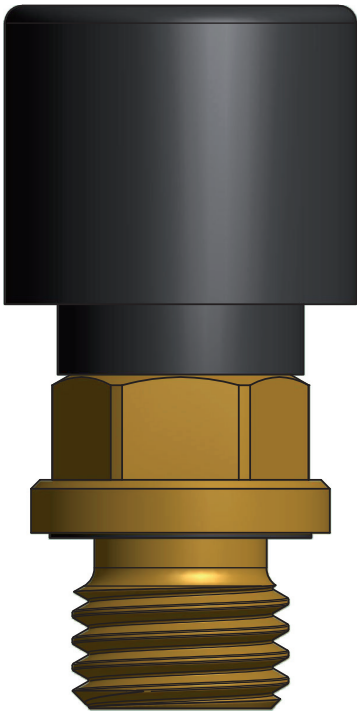

HN Lü-OR
Vent Valve

Application:

- Protection against exposure to dust and impurities

Range of temperature:

- - 20°C to + 80°C (- 4 F to + 176 F)
- Other temperature ranges upon request